


ALPHA PLAN

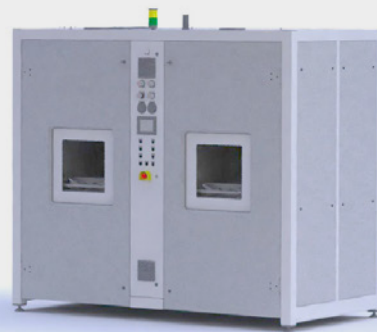

Product brochure
alphaMICRO[®]

Microwave-drying

After the products have been checked for fibre integrity in the alphaFLOW[®] Basic, they must be dried. This takes place in the alphaMICRO[®].

A combination of microwave radiation and hot air support is used. This ensures that drying is as effective as possible, but also gentle. Thanks to innovative sensor technology, each individual product is dried only for as long as necessary. Loading and unloading is done manually.

Technology processes

